




Product Spectrum Data Report

SP210

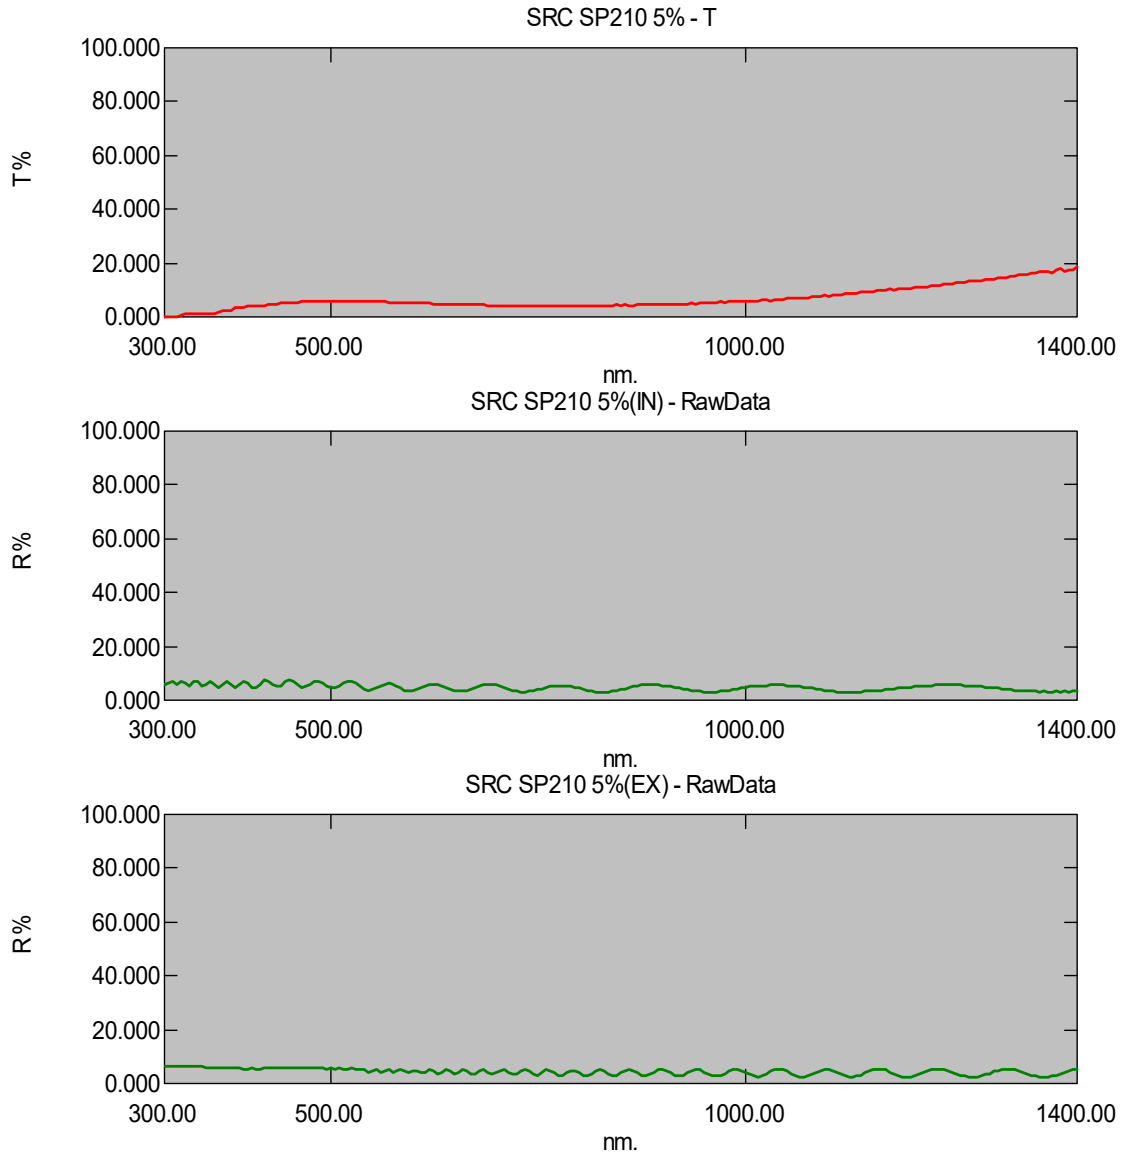

Construction : 1 PLY / 1.8 mil

Visible Light Transmitted (380nm ~ 780nm) : 5.58%

Visible Light Reflected - External : 4.88%

Visible Light Reflected - Internal : 5.15%

Solar Heat Transmitted : 5.70%

Solar Heat Reflected : 4.58%

Solar Heat Absorbed : 89.72%

IR Reduction (900nm ~ 1100nm) : 94.02%

UV Rejected (290nm ~ 380nm) : 99%

Total Solar Energy Rejected(TSER) : 63%

Shading Coefficient : 0.42