




Product Spectrum Data Report

SP211

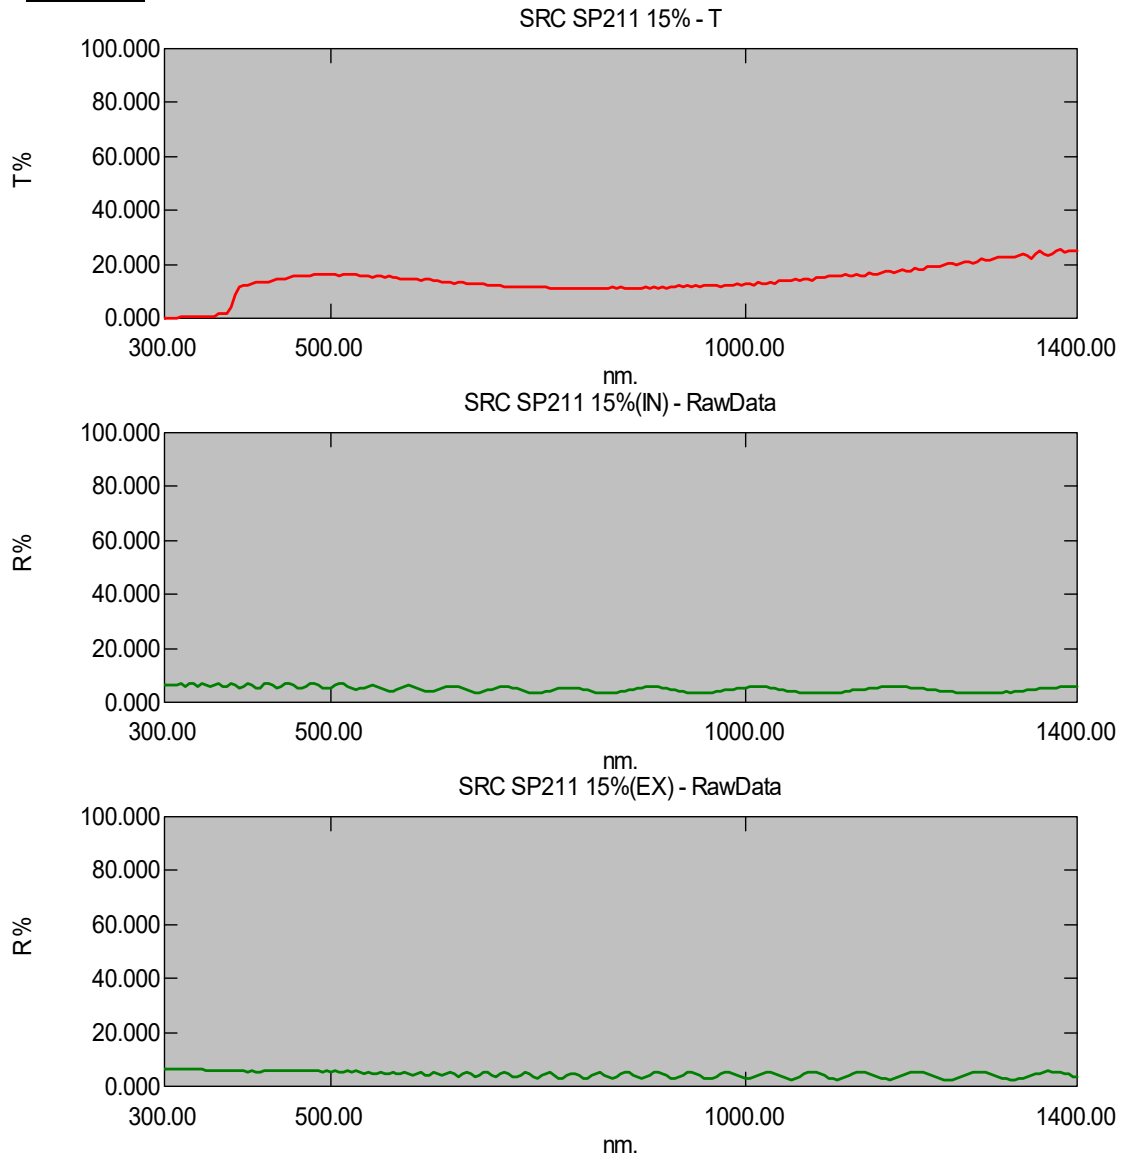

Construction : 1 PLY / 1.8 mil

Visible Light Transmitted (380nm ~ 780nm) : 15.29%

Visible Light Reflected - External : 4.92%

Visible Light Reflected - Internal : 5.36%

Solar Heat Transmitted : 13.76%

Solar Heat Reflected : 4.41%

Solar Heat Absorbed : 81.83%

IR Reduction (900nm ~ 1100nm) : 87.05%

UV Rejected (290nm ~ 380nm) : 99%

Total Solar Energy Rejected(TSER) : 58%

Shading Coefficient : 0.48