


Product Spectrum Data Report

SP212

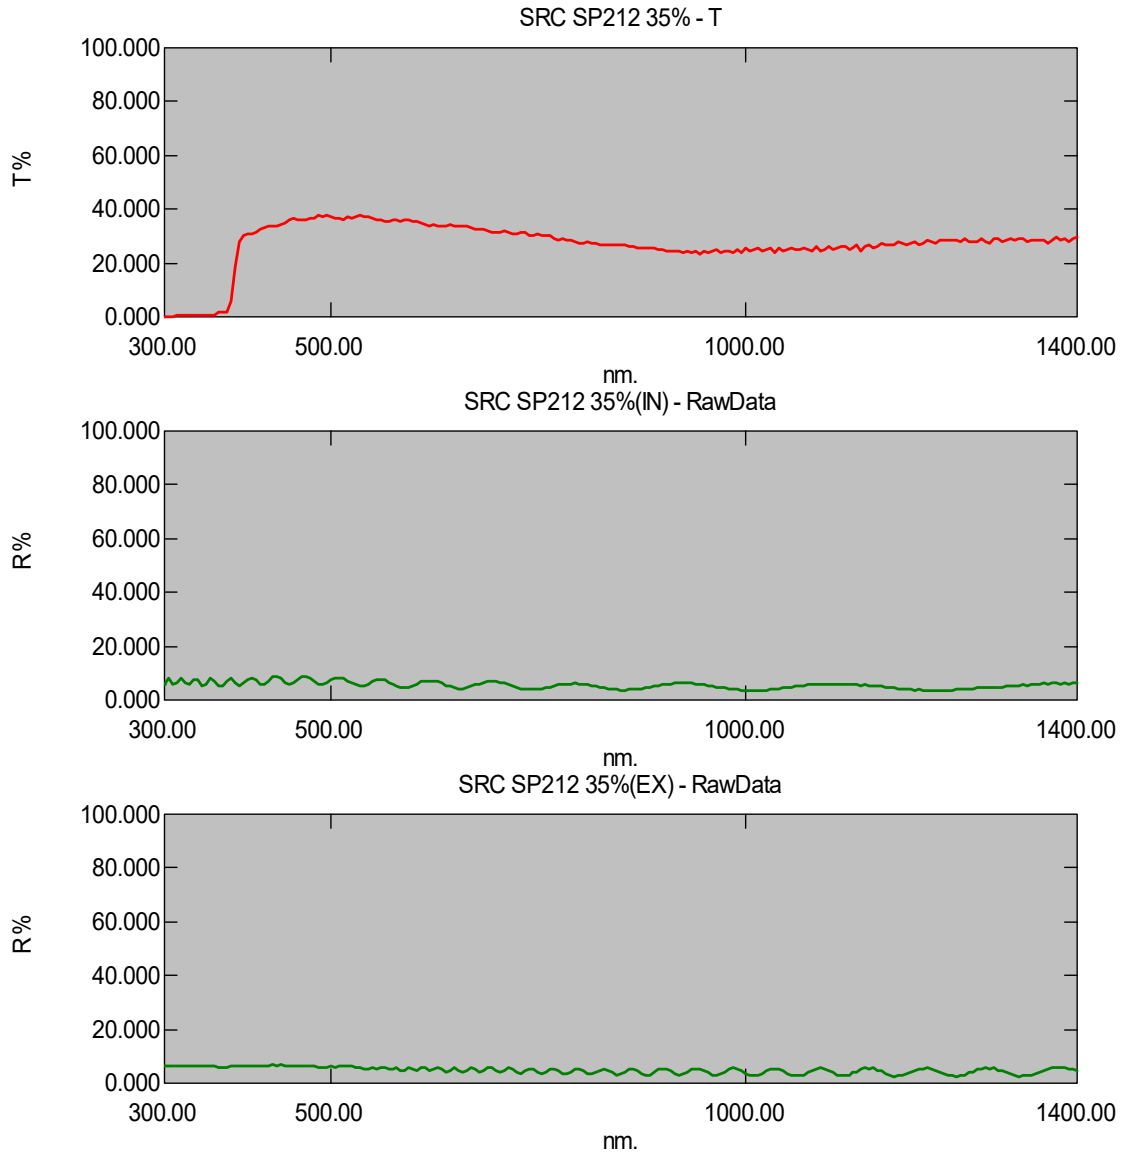

Construction : 1 PLY / 1.8 mil

Visible Light Transmitted (380nm ~ 780nm) : 36.14%

Visible Light Reflected - External : 5.55%

Visible Light Reflected - Internal : 6.37%

Solar Heat Transmitted : 30.19%

Solar Heat Reflected : 5.01%

Solar Heat Absorbed : 64.80%

IR Reduction (900nm ~ 1100nm) : 75.30%

UV Rejected (290nm ~ 380nm) : 99%

Total Solar Energy Rejected(TSER) : 48%

Shading Coefficient : 0.6