

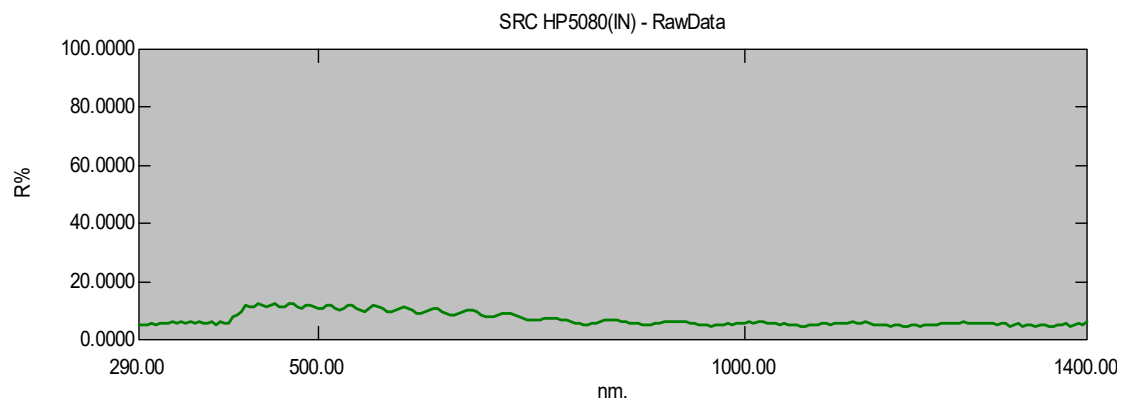


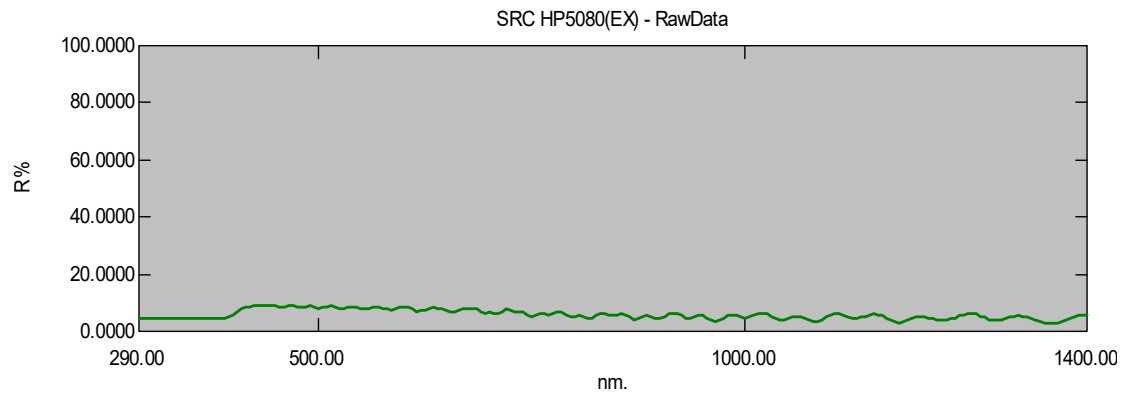

Product Spectrum Data Report

SRC HP5080

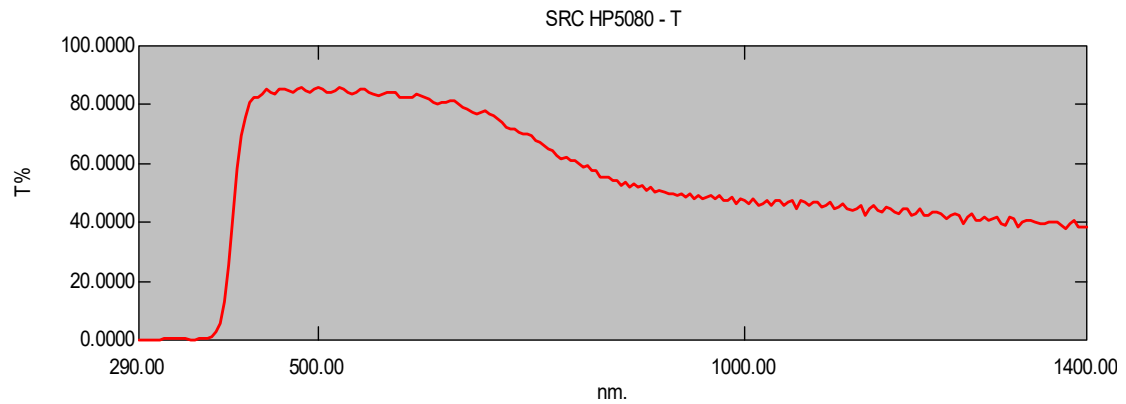

Construction : 2 PLY / 1.5 mil
Visible Light Transmitted (380nm ~ 780nm) : 83.97%
Visible Light Reflected - External : 8.12%
Visible Light Reflected - Internal : 10.74%
Solar Heat Transmitted : 64.93%
Solar Heat Reflected : 6.54%
Solar Heat Absorbed : 28.53%
IR Reduction (900nm ~ 1100nm) : 52.37%
UV Rejected (290nm ~ 380nm) : 99%
Total Solar Energy Rejected(TSER) : 25%
Shading Coefficient : 0.85