
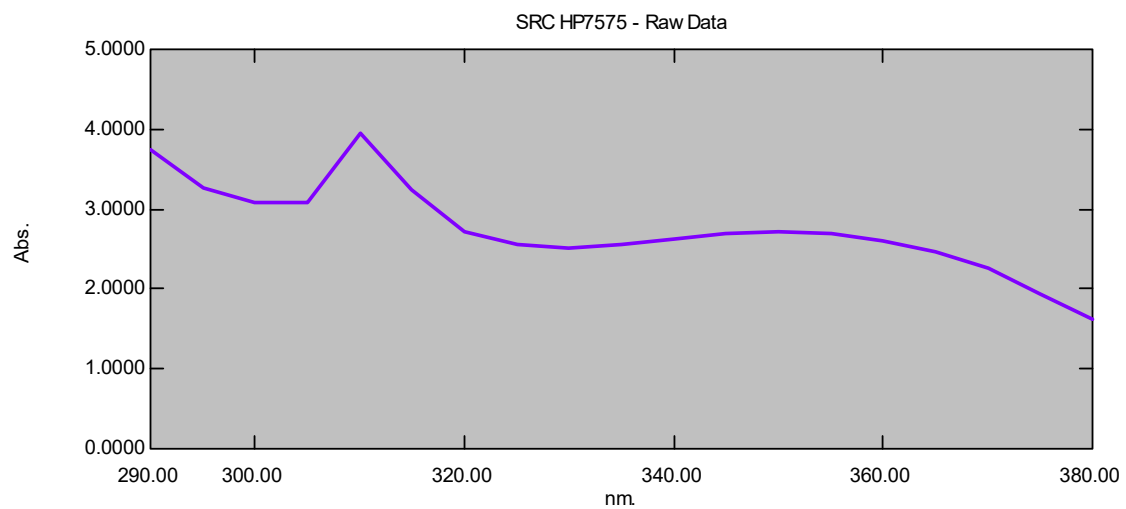


SRC HP7575

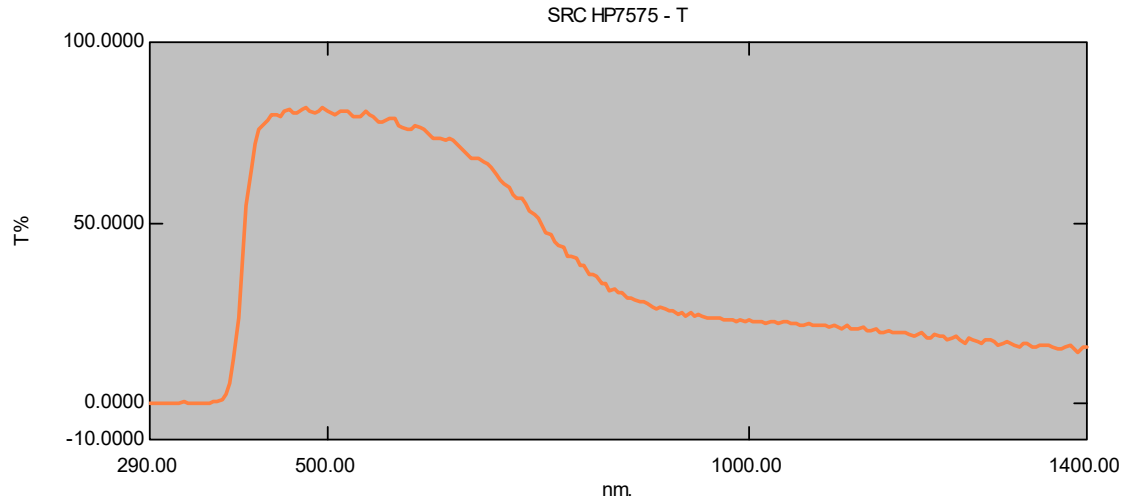

Construction : 2 PLY / 1.5 mil

Visible Light Transmitted (380nm ~ 780nm) : 78.45%

Visible Light Reflected - External : 8.07%

Visible Light Reflected - Internal : 10.45%

Solar Heat Transmitted : 50.42%

Solar Heat Reflected : 6.17%

Solar Heat Absorbed : 43.41%

IR Reduction (900nm ~ 1100nm) : 76.87%

UV Rejected (290nm ~ 380nm) : 99%

Total Solar Energy Rejected(TSER) : 35%

Shading Coefficient : 0.75