


# Product Spectrum Data Report

## SRC SA9666

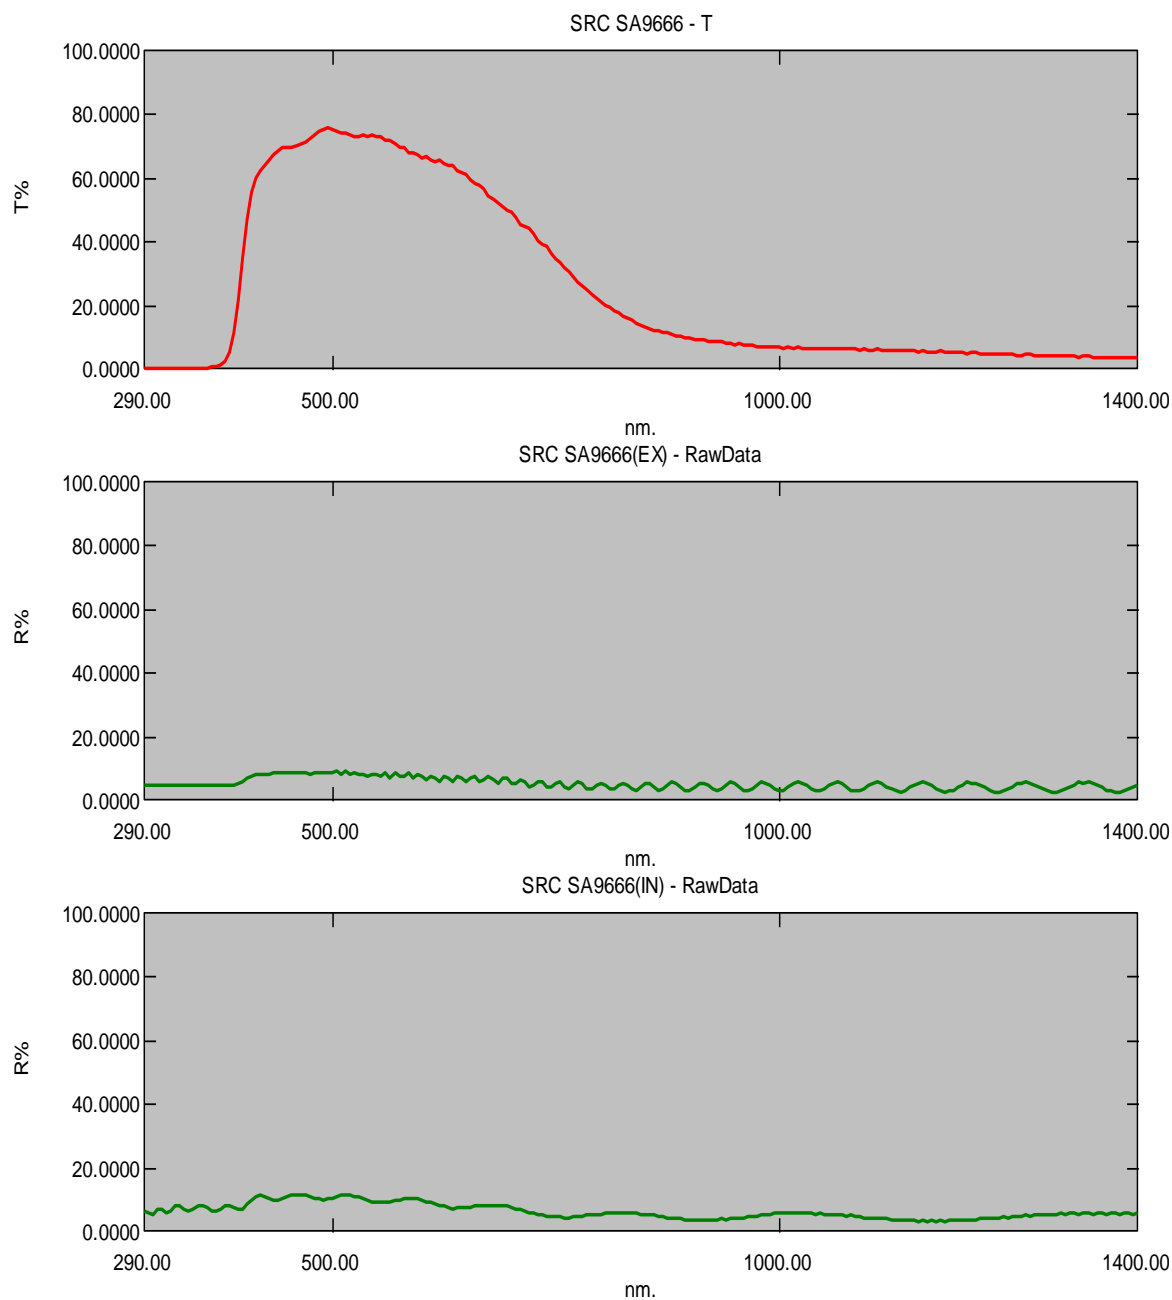

Construction : 2 PLY / 3 mil  
 Visible Light Transmitted (380nm ~ 780nm) : 70.63%  
 Visible Light Reflected - External : 7.66%  
 Visible Light Reflected - Internal : 9.64%  
 Solar Heat Transmitted : 37.88%  
 Solar Heat Reflected : 5.67%  
 Solar Heat Absorbed : 56.45%  
 IR Reduction (900nm ~ 1100nm) : 92.95%  
 UV Rejected (290nm ~ 380nm) : 99.9%  
 Total Solar Energy Rejected(TSER) : 43%  
 Shading Coefficient : 0.66