
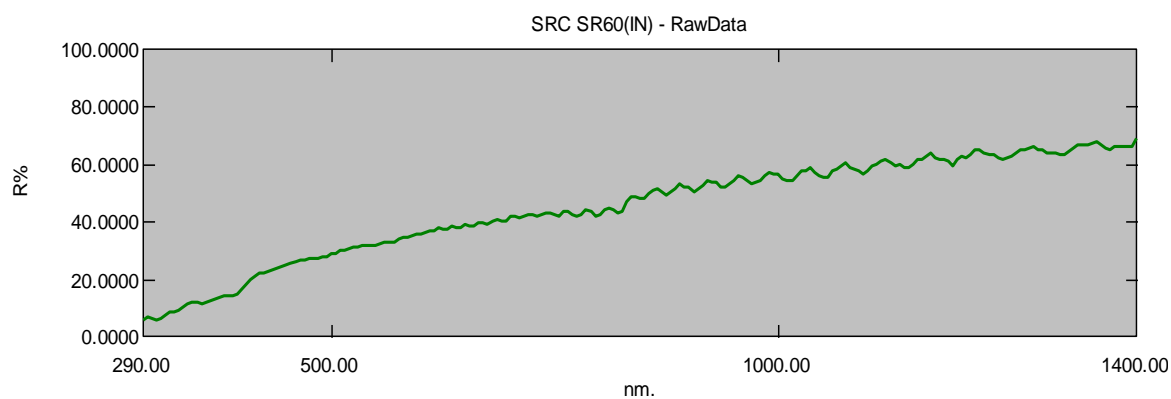
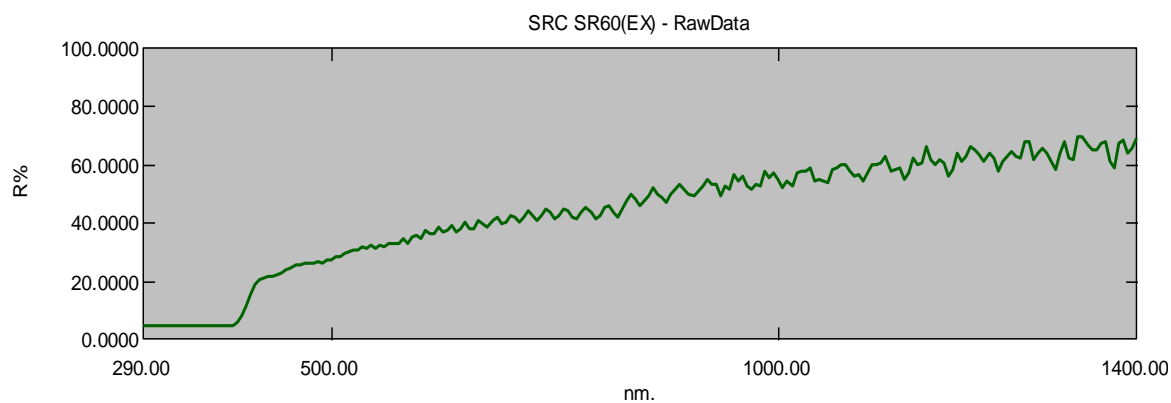


Product Spectrum Data Report

SRC SR60

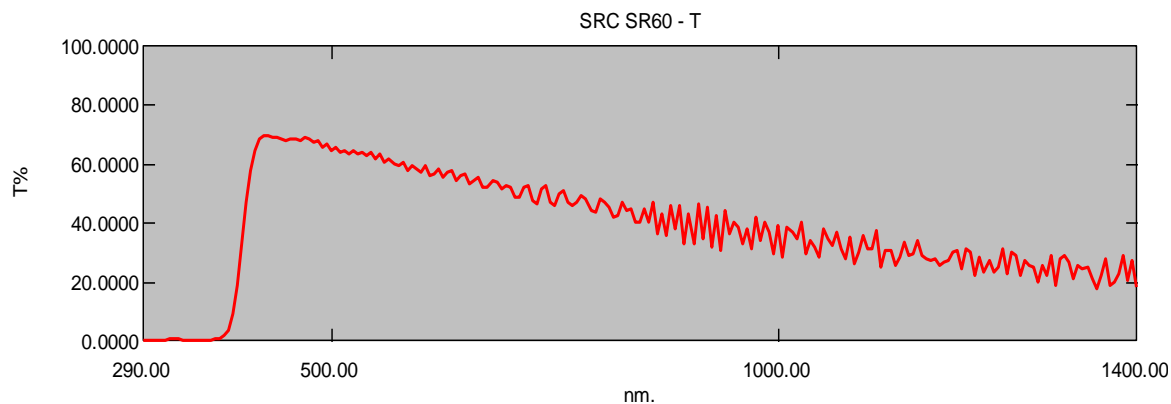

Construction : 2 PLY / 2 mil
 Visible Light Transmitted (380nm ~ 780nm) : 61.12%
 Visible Light Reflected - External : 31.95%
 Visible Light Reflected - Internal : 32.64%
 Solar Heat Transmitted : 48.28%
 Solar Heat Reflected : 40.84%
 Solar Heat Absorbed : 10.88%
 IR Reduction (900nm ~ 1100nm) : 64.74%
 UV Rejected (290nm ~ 380nm) : 99.9%
 Total Solar Energy Rejected(TSER) : 49%
 Shading Coefficient : 0.59