
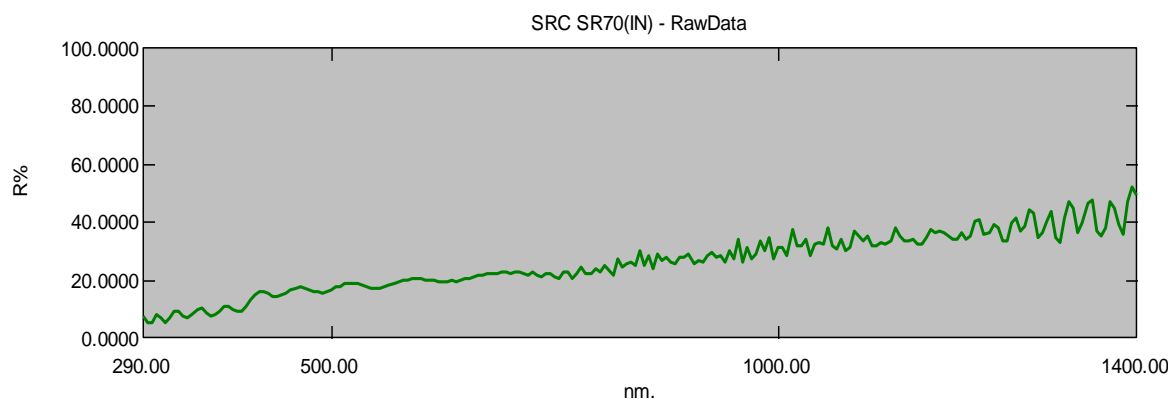
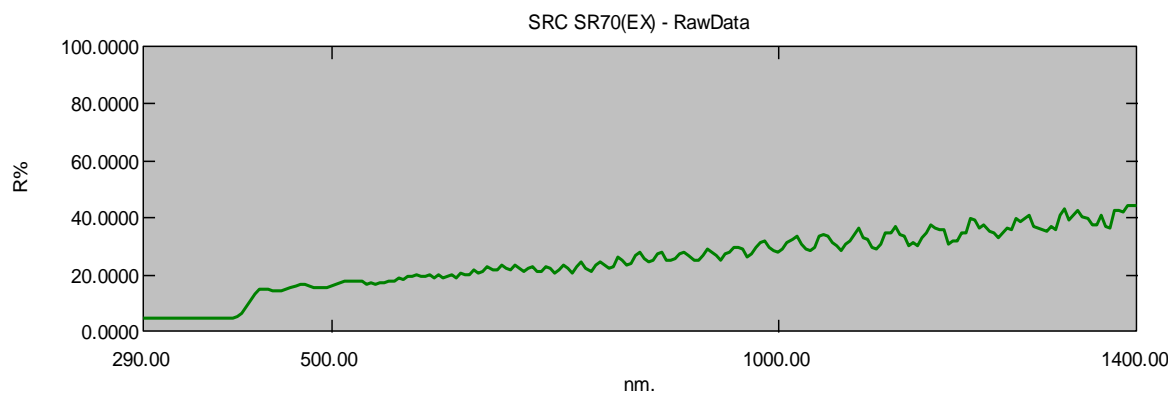


Product Spectrum Data Report

SRC SR70

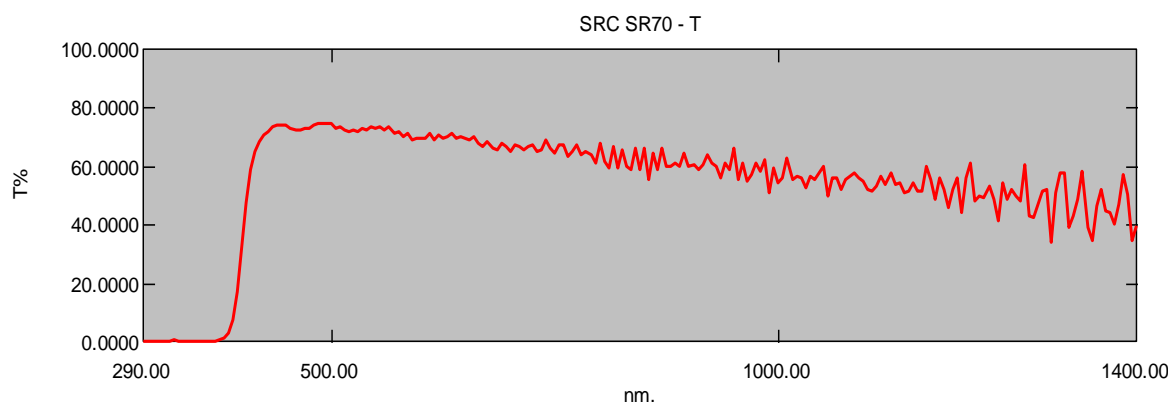

Construction : 2 PLY / 2 mil
 Visible Light Transmitted (380nm ~ 780nm) : 71.58%
 Visible Light Reflected - External : 17.52%
 Visible Light Reflected - Internal : 18.39%
 Solar Heat Transmitted : 63.26%
 Solar Heat Reflected : 22.40%
 Solar Heat Absorbed : 14.34%
 IR Reduction (900nm ~ 1100nm) : 42.62%
 UV Rejected (290nm ~ 380nm) : 99.9%
 Total Solar Energy Rejected(TSER) : 32%
 Shading Coefficient : 0.78