


Product Spectrum Data Report

G50

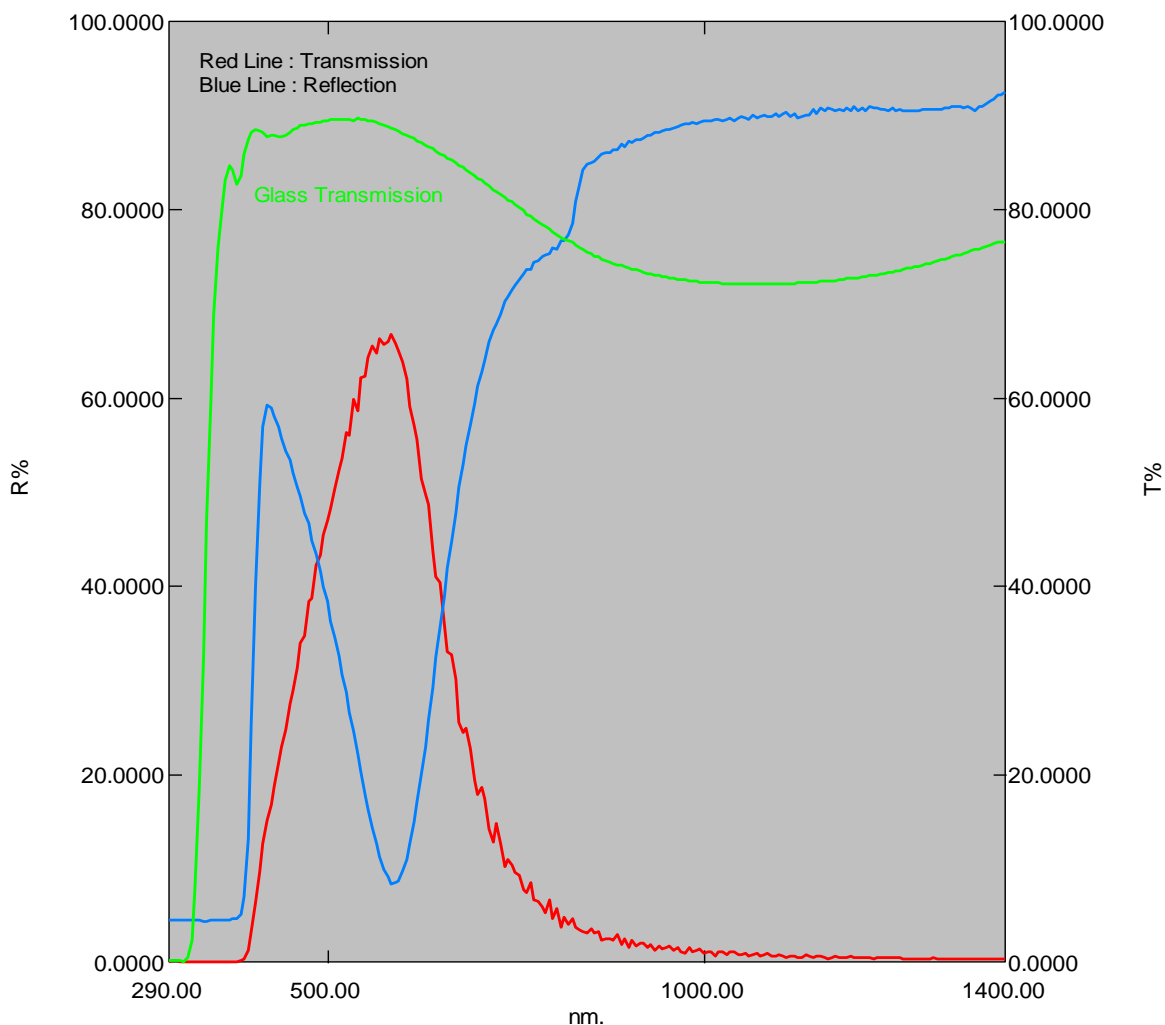

Construction : 2 PLY / 2 mil
 Visible Light Transmitted (380nm ~ 780nm) : 57.98%
 Visible Light Reflected - External : 20.92%
 Visible Light Reflected - Internal : 20.87%
 Solar Heat Transmitted : 21.72%
 Solar Heat Reflected : 58.50%
 Solar Heat Absorbed : 19.78%
 IR Reduction (900nm ~ 1100nm) : 98.83%
 UV Rejected (290nm ~ 380nm) : 99.9%
 Total Solar Energy Rejected(TSER) : 73%
 Shading Coefficient : 0.31