


T70

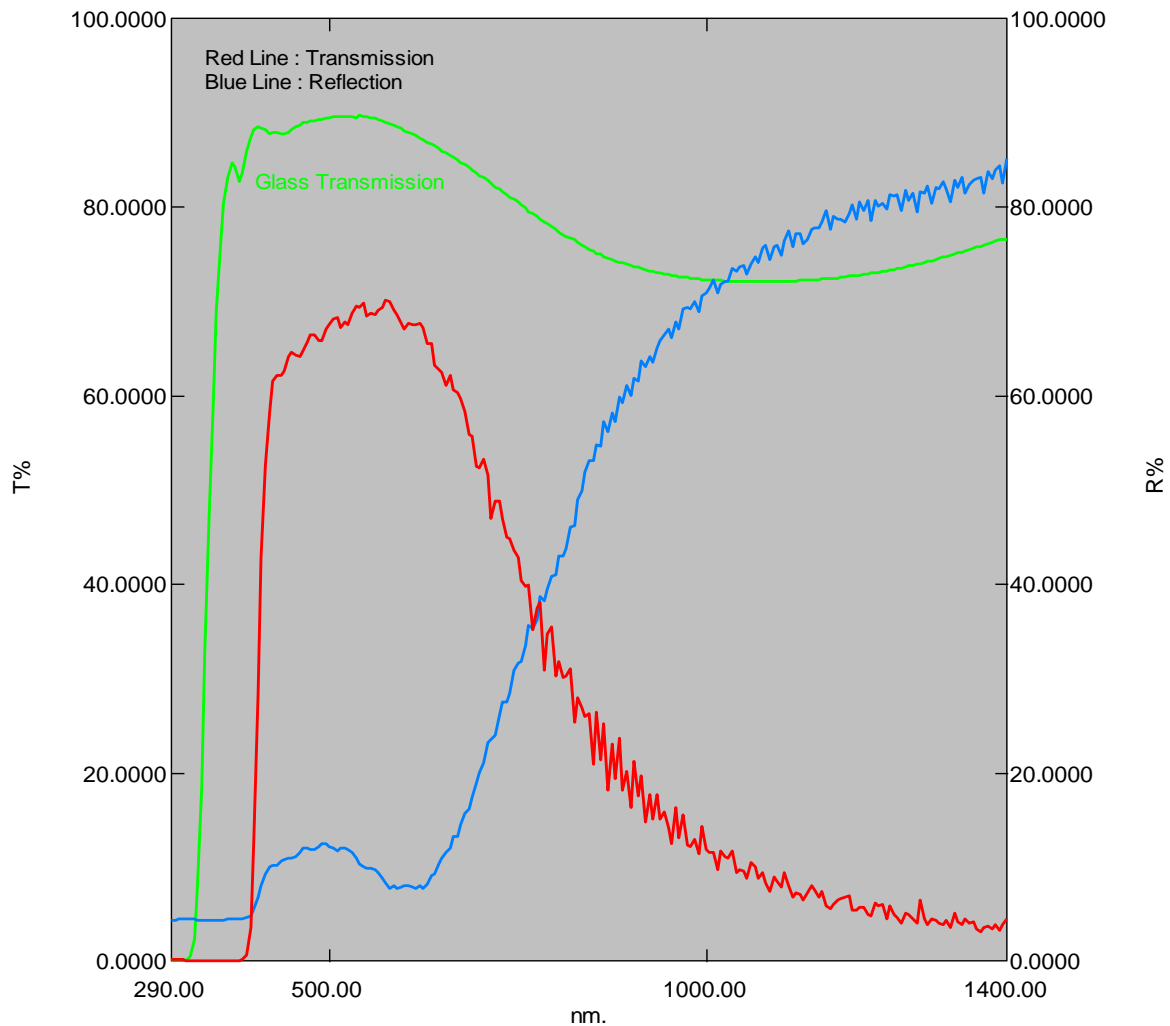

Construction : 2 PLY / 2 mil

Visible Light Transmitted (380nm ~ 780nm) : 68.08%

Visible Light Reflected - External : 9.80%

Visible Light Reflected - Internal : 11.55%

Solar Heat Transmitted : 39.48%

Solar Heat Reflected : 34.97%

Solar Heat Absorbed : 25.55%

IR Reduction (900nm ~ 1100nm) : 87.55%

UV Rejected (290nm ~ 380nm) : 99.9%

Total Solar Energy Rejected(TSER) : 53%

Shading Coefficient : 0.54